

MODEL DM-25 DIAGRAM



PRIMARY CABINET DIMENSIONS

SPECIFICATIONS

MAX WEIGHT CAPACITY : 130 lbs [59 kg]
 COMBINED WEIGHT OF THE MONITORS, ALL ACCESSORIES, & LID
 MAX TRAVEL [EXTENSION] : 26.5 in [67.3 cm]
 LIFT SYSTEM HEIGHT : 23 in [58.4 cm] TO 35 in [88.9 cm]
 MIN MONITOR HEIGHT : 14 in [35.5 cm]
 MAX MONITOR HEIGHT : 25.75 in [65.4 cm] MINUS LID THICKNESS

QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER)

MONITOR DIMENSIONS: W _____, H _____, D _____
 W _____, H _____, D _____
 MIN. INTERIOR CABINET WIDTH : COMBINED MONITOR W+2 in [5.1 cm] = _____ OR 34 in [86.4 cm]
 MIN. LID CUTOUT WIDTH : _____
 MIN. INTERIOR CABINET HEIGHT : H+1 in [2.6 cm] = _____ OR 23 in [58.4 cm]
 MIN. INTERIOR CABINET DEPTH : D+5.5 in [14 cm] = _____
 MIN. LID CUTOUT DEPTH : _____

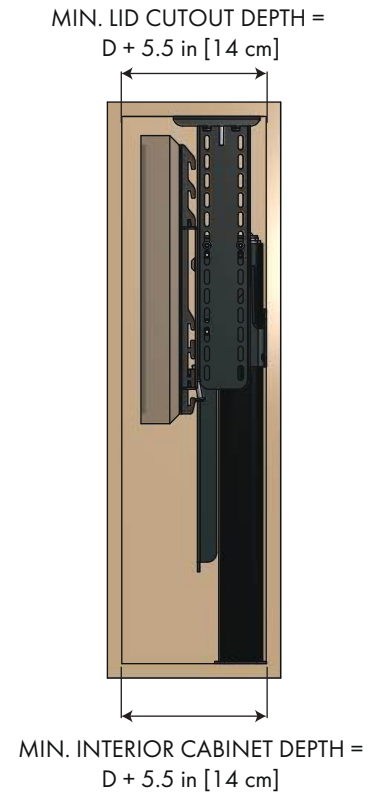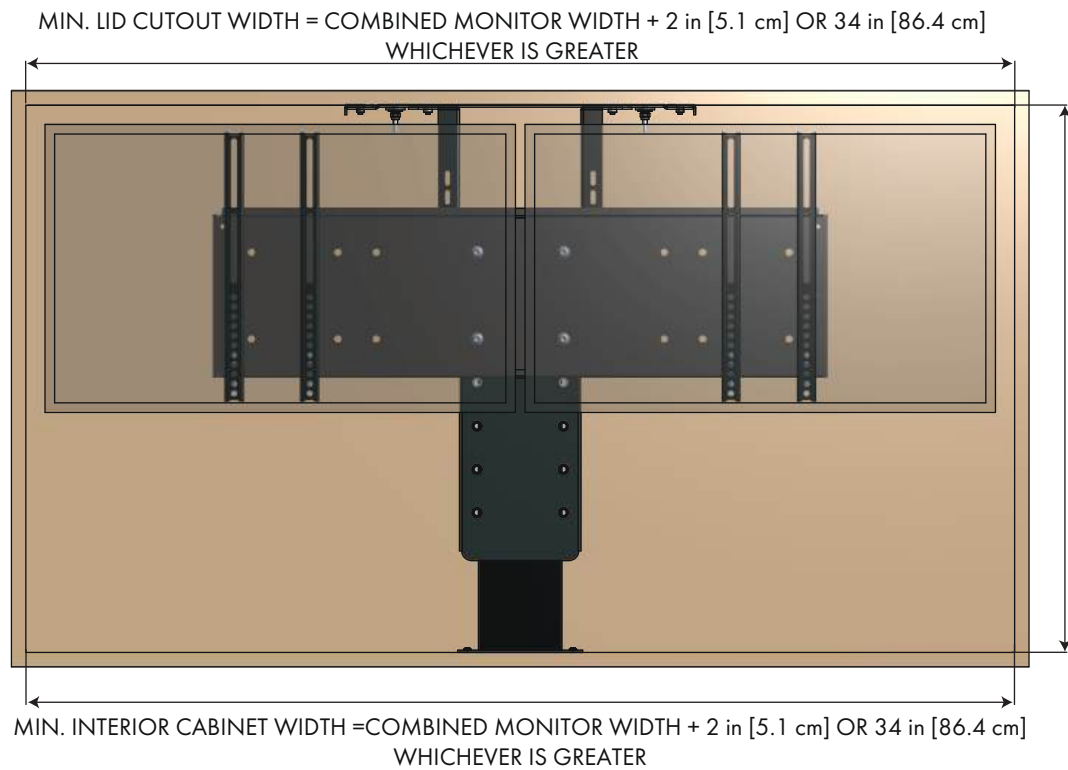

NOTES:


1. THE CABINET BOX SHOWN IN THE DIAGRAM IS FOR REFERENCE ONLY AND IS NOT PROVIDED WITH THE LIFT SYSTEM
2. WHEN DETERMINING MONITOR HEIGHT, ALWAYS USE MANUFACTURER SUPPLIED "MONITOR WITHOUT STAND" HEIGHT
3. LIFT MECHANISM IS POWDER COATED BLACK STEEL, COLORS IN DIAGRAM ARE FOR CLARITY ONLY

NEXUS₂₁

COPYRIGHT 2024 - ALL RIGHTS RESERVED
 UPDATED 11/14/24

MODEL DM-25 DIAGRAM

CABINET REFERENCE DIMENSIONS

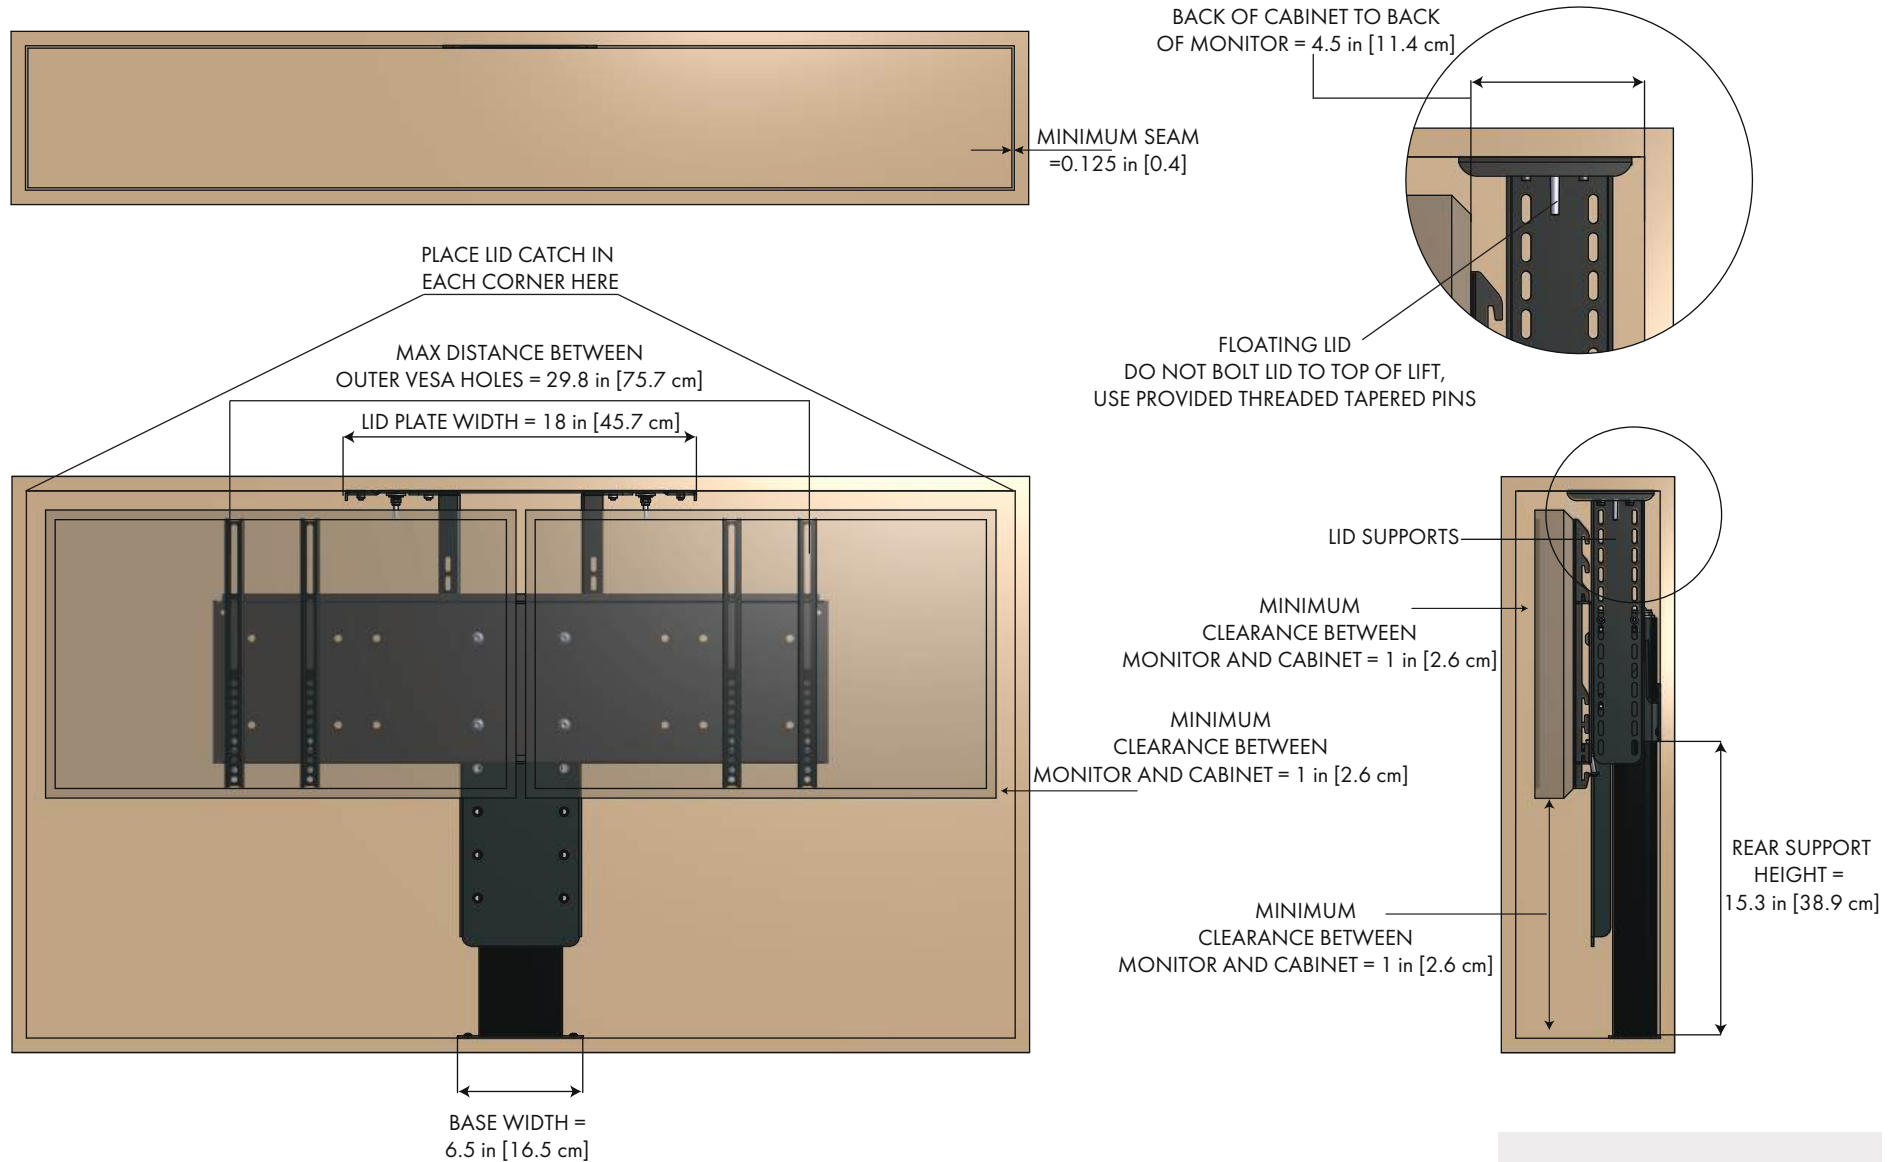

NOTES:

1. LID SUPPORTS ALLOW LID PLATE TO BE ADJUSTED FLUSH WITH UNDERSIDE OF LID
2. LID ADAPTER PLATE ALLOWS LID TO FLOAT WITH THE USE OF LID CATCHES
3. MINIMUM SEAM CAN BE REDUCED TO 0.0625 in [0.2 cm] WITH A 45 DEGREE BEVEL ON THE EDGES OF THE LID

NEXUS₂₁

COPYRIGHT 2024 - ALL RIGHTS RESERVED
UPDATED 11/14/24