




DESCRIPTION:

INDOOR/OUTDOOR PRO GRADE SPEAKER
CABLE- 2C/14 AWG 105 STRAND OXYGEN FREE
COPPER, UL CMR, SUN RES HD PVC JKT - 500
FT/152M BOX

REGULATORY:

UL :UL 444 & UL 13,
Type (UL) CMR/CL3 c(UL)
EU RoHS 2011/65/EU Compliant
Power limited not to exceed 80v

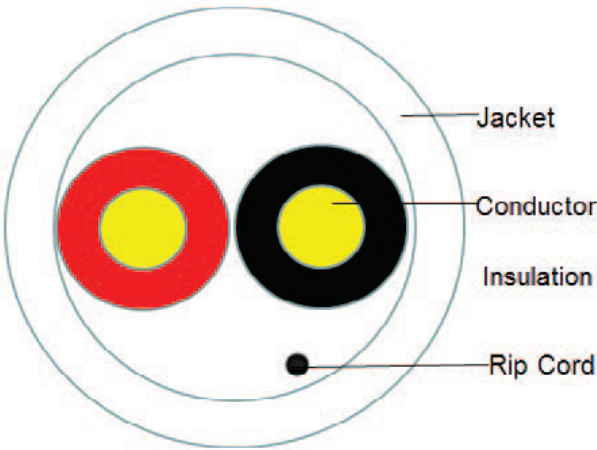

CONSTRUCTION CHARACTERISTICS:

Conductor	Material	Stranded Bare Copper
	Size	14AWG X 2C
	Construction	105/0.16mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	2.70mm +/-0.10mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.80mm
	AVG.Thickness	0.95mm
	Diameter	7.20mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend Radius		Min 15D/150mm

ELECTRICAL & PHYSICAL CHARACTERISTICS:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 9.2 ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage - Insulated/Operating	Max 300V/80V
Impedance (near by)	62±6Ω
Capacitance (near by)	28.9±3pf/ft

MARKING:

STRUCTURED CABLE PRODUCTS --- 14/2OFC-HD-D E198137 SCP3 (UL) CL3 C(UL) CMR 2C 14AWG
105 STRAND OFC -- INDOOR/OUTDOOR - SUN RES -- EN50575:2014 CE Dca UV-PVC JKT FT4 75C
RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

PACKAGING:

Approx.Weight 12kgs/26.455lbs	Approx.Dimension(mm) 350X260X350	Package 500FT/Box	Packages per pallet 36
----------------------------------	-------------------------------------	----------------------	---------------------------