

STEINWAY LYNGBORF



Steinway & Sons MODEL S SOUNDBAR

The Steinway & Sons Model S Soundbar redefines soundbar performance, delivering extraordinary clarity, outstanding musicality, and exceptionally powerful bass. The RoomPerfect™ technology calibrates the soundbar for any room and any placement, always achieving the best possible sound performance when mounted as an on-wall speaker or placed on furniture.

EXCEPTIONAL LOUDSPEAKER TECHNOLOGY AND 1.600 WATT POWER

Three renowned Air Motion Transformer tweeters, three dedicated midrange drivers, and two powerful woofers, combined with amplification power of 1.600 watt, turn every movie and musical selection into an extraordinary experience, far beyond what a common soundbar or any built-in TV speaker can deliver. Based on the renowned Model S speaker technology built into an extra-wide design, the Model S Soundbar can even serve as a powerful high-end audio loudspeaker for music, providing excellent stereo imaging and soundstaging.


OUTSTANDING BUILD QUALITY AND FINISHES

Made from machined solid aluminum front and back panels, a low-resonance MDF frame with five acoustically separated chambers inside, and available in matte black or immaculate high gloss black with gold details and signature strings, the Model S Soundbar is as beautiful as it is timeless. Custom finishes are available on request. Every soundbar is assembled and finished by hand in Skive, Denmark.

INTEGRATED SYSTEM APPROACH FOR THE IDEAL AMPLIFIER MATCH

Steinway Lyngdorf's integrated system approach ensures the ideal amplifier match and the best system performance. The Model S Soundbar is powered by four amplification channels from the Steinway & Sons A1 or A2 digital power amplifier, while the Steinway & Sons stereo or surround processor with RoomPerfect™ adapts it to the room acoustics and ensures the best possible sound performance anywhere.

- Powered by 1.600 watt amplification and calibrated with RoomPerfect™
- Tweeter and midrange driver from Model S-15 with two 10" woofers
- Left-center-right speaker layout for music in stereo, or downmix from surround sound
- Perfectly matching 85" TVs, while also suiting TVs and screens from 77" to 98"

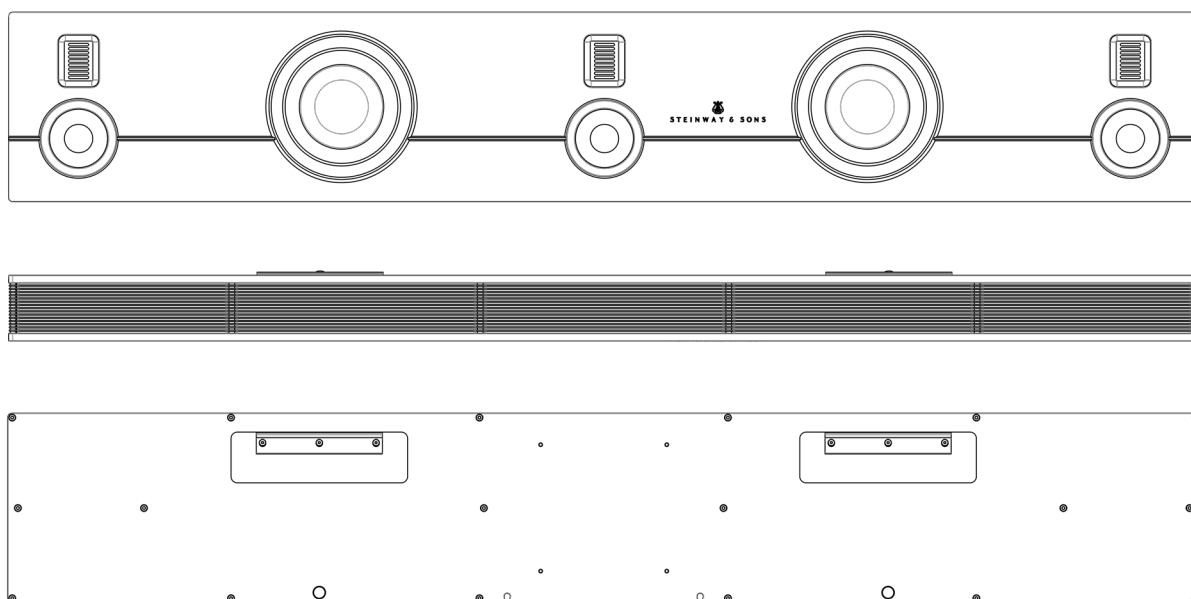

SPECIFICATIONS

Description:	Full-range on-wall loudspeaker
Tweeter:	3 x Air Motion Transformer, Kapton foil, neodymium magnet
Midrange:	3 x 5,25", anodized aluminum cone, neodymium magnet
Woofers:	2 x 10" aluminum cone, 4-layer voice coil, neodymium magnet
Enclosure:	Aluminum front and back, MDF frame
Frequency range:	40 Hz – 20 kHz (-3 dB)
Amplification:	P100, P200, P300: A1 or A2 amplifiers, 4 x 400 watt SP-1: A2 amplifier, 4 x 400 watt. Special requirements apply, please get in contact.
Amplification needed:	4 (left channel, right channel, center channel, dual woofers)
Max SPL@1m:	113 dB
Crossover:	Woofer/midrange: Digital, stored in processor (200 Hz, 4th order) Midrange/tweeter: (2500 Hz, 4th order)
Connections:	2 x Neutrik speakON NL4
Placement:	On-wall
Dimensions (W x H x D):	1890 x 300 x 104 mm / 74.4 x 11.8 x 4.1 inches (incl. base plinth)
Weight:	48 kg / 106 lb
Finish:	Matte black, high-gloss black with gold accents, custom finishes available